


- Enclosures
- Hinges
- Locks
- Handles
- Accessories
- Rotary Operating Handles
- Insulators
- Transformer Equipment
- Index

<b>Material</b>	SMC (Sheet Moulding Compound)			
<b>Operating Temperature</b>	-50° C to - 200° C			
<b>Glow Wire Capability / Flammability</b>	960° / UL94 V0			
<b>Expected UV Life (Direct Exposure)</b>	25 years +			
<b>IP Level</b>	IP66			
<b>IK Level</b>	IK10			
<b>Security Level</b>	1	2	3	4

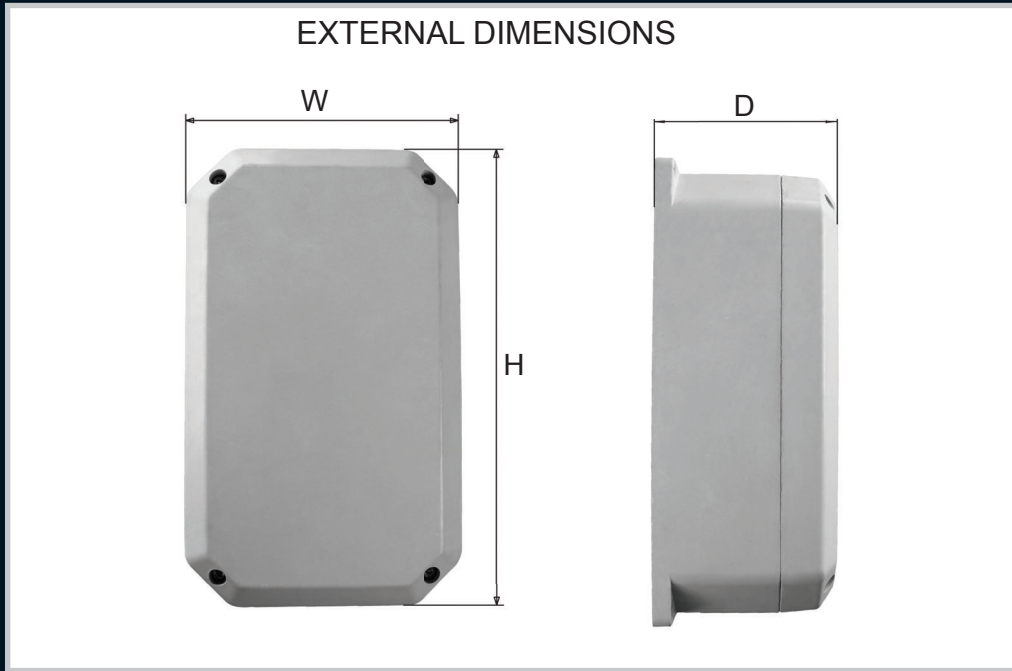

Part Number	Description	H (mm)	W (mm)	D (mm)
040-916	Robust 201208 Empty Enclosure with No Flap	205	125	80
040-935	Robust 261810, Empty Enclosure with No Flap	261	181	104
040-937	Robust 574310 Empty Enclosure with No Flap	570	430	100
040-949	Robust 201208 Deep Empty Enclosure with No Flap	205	125	100
040-952	Robust 483080 Empty Enclosure with No Flap	476	296	80
040-962	Robust 282513 Empty Enclosure with No Flap	280	250	130

- Weather and UV resistant
- Up to 4 pole din breakers or isolators
- IP Level: 66
- Made from GRP - Glass Reinforced Polyester

Material	SMC (Sheet Moulding Compound)			
Operating Temperature	-50° C to - 200° C			
Glow Wire Capability / Flammability	960° / UL94 V0			
Expected UV Life (Direct Exposure)	25 years +			
IP Level	IP66			
IK Level	IK10			
Security Level	1	2	3	4

Enclosures

Hinges

Locks

Handles

Accessories

Rotary Operating Handles

Insulators


Transformer Equipment

Index



Robust Standard

Robust Deep

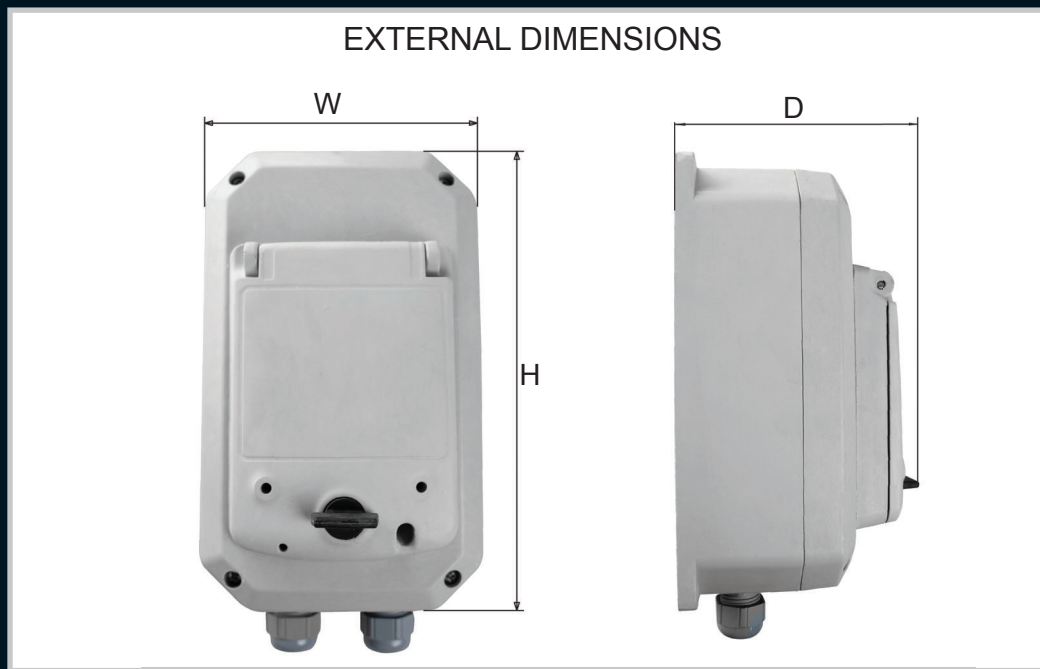

Part Number	Description	H (mm)	W (mm)	D (mm)
040-920	Robust 201208 PC Flap with Barrel Lock	205	125	80
040-921	Robust 201208 PC Flap with Plastic Lock	205	125	80
040-922	Robust 201208 GRP Flap with Barrel Lock	205	125	80
040-923	Robust 201208 GRP Flap AFAK AU	205	125	121
040-944	Robust 201208 Deep PC Flap with Plastic Lock	205	125	100
040-945	Robust 201208 Deep GRP Flap with Barrel Lock	205	125	100
040-946	Robust 201208 Deep GRP Flap with Plastic Lock	205	125	100

- Weather and UV resistant
- Up to 4 pole din breakers or isolators
- IP Level: 66
- Made from GRP - Glass Reinforced Polyester